




1	2	3	4	5	6	7	8		
ON'DWG					REV. LOC.	ECN NO.	REVISION RECORD	DATE	BY
					△				
					△				
					△				

DIMENSIONS Unit=mm

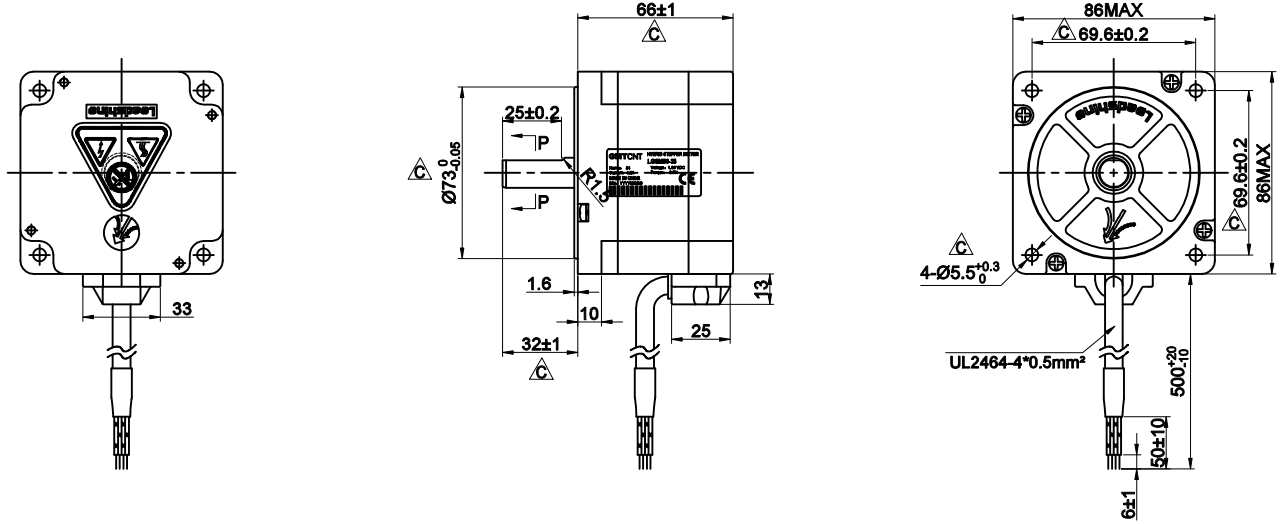

	STEP	A	B	A̅	B̅	
↓	1	+	+	-	-	CW ↑
	2	-	+	+	-	
	3	-	-	+	+	
↑	4	+	-	-	+	



Specification		
1	Phase	2
2	Step Angle	1.8°±5%/Step
3	Voltage	1.68 VDC
4	Current	4.0A
5	Resistance	0.42±0.1Ω
6	Inductance	2.67±20% mH
7	Holding Torque	≥250N.cm
8	Surface Treatment	
9	Dielectric Strength	△ 500VAC/5mA/1min
10	Insulation Resistance	△ ≥100MΩ/500VDC
11	Insulation Class	Class B
12	Lead Style	UL2464-4*0.5mm²
13	Weight	≈1.8KG

CTQ Sign: △ Customer; ▽ Process; ▲ Law			NAMES	SIGNATURE	DATE	TITLE	LGSM86-35
All Material are to be RoHS Compliant			DESIGN			MODEL	
UNLESS OTHERWISE SPECIFIED			STANDARD			DWG.NO.	2024.05.14
Unit:mm	<=6 ±0.1		TECHNOLOGY			DATE	
	>6~30 ±0.2	Tolerances:	CHECK			MATERIAL	
GB/T1804-m	>30~120 ±0.3	Angles:±0.1°	APPROVE				
ISO 2768-1 class m	>120~400 ±0.5	Chamfer:±5°	FIRST ANGLE METHOD	⊕	REV.		
			ECN SIGN	△	A1		

A
B
C
D
E
F